



**HAL**  
open science

## **Silicon-germanium photodetectors for energy-aware chip-scale communications**

D. Benedikovic, G. Aubin, L. Viot, J.-M. Hartmann, F. Amar, X. Le Roux,  
C. Alonso-Ramos, E. Cassan, D. Marris-Morini, F. Boeuf, et al.

► **To cite this version:**

D. Benedikovic, G. Aubin, L. Viot, J.-M. Hartmann, F. Amar, et al. Silicon-germanium photodetectors for energy-aware chip-scale communications. 2022 Photonics North (PN), May 2022, Niagara Falls, France. pp.1-2, 10.1109/PN56061.2022.9908338 . hal-04493085

**HAL Id: hal-04493085**

**<https://universite-paris-saclay.hal.science/hal-04493085v1>**

Submitted on 6 Mar 2024

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Silicon-germanium photodetectors for energy-aware chip-scale telecommunications

(Invited paper)

D. Benedikovic<sup>1,2\*</sup>, L. Viro<sup>3</sup>, G. Aubin<sup>2</sup>, J.-M. Hartmann<sup>3</sup>, F. Amar<sup>2</sup>, X. Le Roux<sup>2</sup>, C. Alonso-Ramos<sup>2</sup>, E. Cassan<sup>2</sup>, D. Marris-Morini<sup>2</sup>, F. Boeuf<sup>4</sup>, B. Szelag<sup>3</sup>, and L. Vivien<sup>2</sup>

<sup>1</sup>University of Žilina, Dept. Multimedia and Information-Communication Technologies, 01026 Žilina, Slovakia

<sup>2</sup>Université Paris-Saclay, CNRS, Centre de Nanosciences et de Nanotechnologies, 91120 Palaiseau, France

<sup>3</sup>University Grenoble Alpes and CEA, LETI, 38054 Grenoble, France

<sup>4</sup>STMicroelectronics, Silicon Technology Development, 38926 Crolles, France

\*[daniel.benedikovic@uniza.sk](mailto:daniel.benedikovic@uniza.sk); [daniel.benedikovic@c2n.upsaclay.fr](mailto:daniel.benedikovic@c2n.upsaclay.fr)

**Abstract**—We report on recent advances in silicon-germanium photodetectors with a lateral p-i-n hetero-junction. We discuss a fast, sensitive and energy-wise operation, demonstrating that this generation of optical photodetectors holds much promises for future on-chip telecommunications.


**Keywords**—silicon photonics; germanium; photodetectors; opto-electronics; on-chip telecommunications; energy consumption

## SI-GE-SI PHOTODETECTORS

Semiconductor-based photodetectors are key elements to many applications in nanophotonics, providing efficient signal conversion between optical and electrical domains. In modern optoelectronics and communications, III-V and group-IV materials are in the center of performant photodetectors. While III-V detectors were standards in optical communications for many years, silicon-germanium (Si-Ge) alternatives are taking a rapid leap nowadays as mature photonic building blocks within a monolithic and CMOS-compatible platform [1-6].

Si-Ge photodetectors can be seamlessly fabricated using open-access Si foundries, leveraging versatile and low-loss Si platform combined with high-quality Ge epitaxy. From a design and technology perspective, recent breakthroughs in the development of on-chip Si-Ge photodetectors afford definite advantages over III-V counterparts [1], including trustworthy opto-electrical performances and reduced production cost. In this invitation, we report our latest results obtained with telecom-band-operated Si-Ge-Si photodetectors based on lateral p-i-n hetero-junctions [1-6].

The p-i-n photodiodes were fabricated on 200 mm SOIs using Si-foundry tools and processes. Si-Ge-Si photodetectors are combined with a loss-loss butt-coupling light injection [2]. This provides simple and unique integration scheme, favoring better control over the modal confinement, improved engineering of the intrinsic diode zone, and easier fabrication compared to other alternatives. As a result, Si-Ge-Si photodetectors have compact footprint and yield enhanced opto-electrical performances, alongside with much simpler manufacturing that reduces a number of process steps. In turn this supports a full integration of passive and active photonic devices into a well-mastered opto-electronic device library.

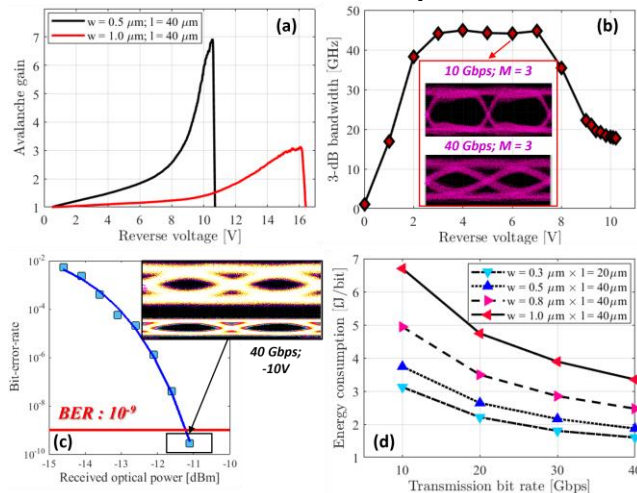

**Figure 1:** Avalanche operation of Si-Ge-Si photodiodes. (a) Gain and (b) 3-dB bandwidth vs. reverse bias. (c) BER vs. received power. (d) Energy consumption vs. bit rate.

Under low-voltage operation, Si-Ge-Si devices yielded small dark-currents between 10 and 150 nA, high photo-responsivity of 1.2 A/W at -0.5V, and fast response beyond 50 GHz [2-4]. High-speed operation up to 40 Gbps was obtained for different biases and device geometries [4]. Optical power sensitivities down to -14 and -11 dBm were measured for link rates of 10 and 25 Gbps, respectively [3]. Avalanche operation of Si-Ge-Si p-i-n's is shown in Fig. 1. For an avalanche operation, we obtained a substantially better opto-electrical performances for our

Si-Ge-Si photodetectors. This includes high responsivities beyond the limit of quantum efficiency [5], simultaneous high-speed and low-noise operation [6], low optical power sensitivities (-11 dBm for 40 Gbps) [5], and energy-aware photodiode operation with a level of few fJ/bit only, without additional electronics on a chip [6].

#### REFERENCE

- [1] D. Benedikovic, *et al.*, *Nanophotonics* **10**,2021.
- [2] L. Virost, *et al.*, *Optics Express* **25**, 2017.
- [3] D. Benedikovic, *et al.*, *Photonics Research* **7**, 2019.
- [4] D. Benedikovic, *et al.*, *IEEE J. Quantum Electron* **56**, 2020.
- [5] D. Benedikovic, *et al.*, *Optica* **7**, 2020.
- [6] D. Benedikovic, *et al.*, *IEEE J Sel Top Quantum Electron* **28**, 2022.